


COMMERCIAL SPACE LED PANEL LIGHTS

NEW!

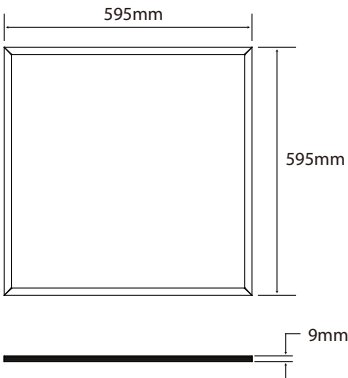

SPACE LED Panel Light, 600x600mm, Cool White 5,000K, Available in 30W and 40W

- Available in 30W or 40W, comparable to T5 and T8
- High quality LED's producing 3150-4000 lumens
- Complies with Part L2 of Building Regulations
- 50% energy saving compared to T8 fluorescent
- Ideal for PIR switching
- 5,000K is an ideal working environment colour, and CRI >80 is suitable for office installations
- Driver complete with male and female loop in/out connectors enables fast fix installation for testing and avoids damage to panels
- Slim profile. Fits into 15mm and 24mm standard T Bar ceiling grids.
- Optional suspension and surface mounting kits

	30W	40W
Cool White 5,000K	RSP030506060-23	RSP040506060-23
Dali Dimmable	RSP030506060DD-23	RSP040506060DD-23
1-10V Dimmable	RSP030506060DA-23	RSP040506060DA-23
Emergency	RSP030506060E-23	RSP040506060E-23
Dali Emergency	RSP030506060DDE-23	RSP040506060DDE-23
1-10V Emergency	RSP030506060DAE-23	RSP040506060DAE-23
Comparable to:	4x18W Fluorescent	4x18W Fluorescent
Total Power (W):	30	40
Power Factor:	0.9	0.9
Total Light Output (lm):	3,150	4,000
Beam Angle (deg):	110	110
CCT at L100 (K):	5,000	5,000
CRI at L100:	>80	>80
Efficacy (lm/cctW):	105	100
Lifetime (hrs):	50,000	50,000
Width (mm):	595	595
Height (mm):	595	595
Depth (mm):	9	9
Box Qty:	4	4
Weight (kg):	4	4
IP:	20	20



FIRE ROUTE APPROVED BY ROBUS