

TASMAN 9.2W LED DIMMABLE DOWNLIGHT WITH INTEGRATED DRIVER, 3000/4000K

RTA9P230-01, RTA9P240-01

RTA9P230-15, RTA9P240-15

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Note:

Product technical information and specification may change over time without prior notification
For the latest technical information please visit our web site WWW.ledgrouprobust.com or robustdirect.com

Specifications

Model NO.:	RTA9P230-01/15	RTA9P240-01/15
Voltage:	220V-240V~ 50Hz	220V-240V~50Hz
Power:	9.2W	9.2W
Lumen:	700lm	750lm
CCT:	3,000K	4000K
CRI:	80	80
Beam angle:	38°	38°
PF:	0.95	0.95
IP:	20	20
Ta range:	-20°C~40°C	-20°C~40°C
safety class:	class II	class II
Weight:	0.14Kg	0.14Kg
Installation:	Recessed mounting	Recessed mounting
Warranty:	2 years	2 years


Dimensions:

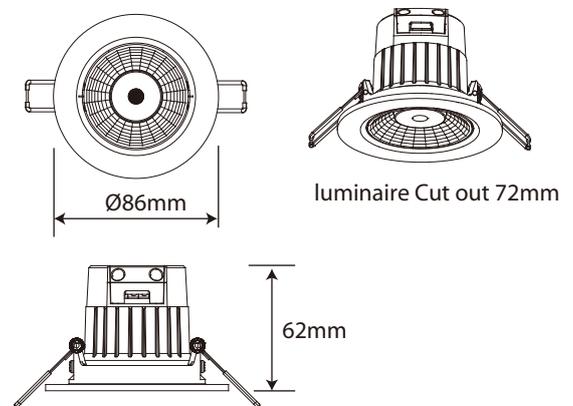

Installation: Recessed mounting Recessed mounting
Dimmable with leading and trailing edge dimmers

Safety Instructions:

Risk of Fire
Required clearance from structural members and building element
SCB = 50mm HCB = 25mm

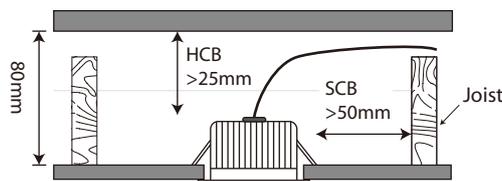

Luminaire not suitable for covering with thermally insulating material

Information for the Product user:

1. Please note the requirement to dispose of Waste Electrical & Electronic Equipment separately from household waste (WEEE marked with crossed out wheelie bin symbol).
2. Please consider your role in contributing to re-use and recycling by returning this product at end of life to a collection centre for waste electrical equipment or a Civic Amenity site, or to a retail outlet from which you are purchasing a replacement.
3. This equipment may contain substances that are hazardous to health and the environment if disposed of carelessly. It is important that it is separated from normal household waste and recycled in the WEEE chain
4. The "crossed out wheelie bin symbol" on a product indicates this equipment must not be disposed of in normal household waste, but should be disposed of according to local WEEE regulations

The Installation must be carried out by an electrician

LED Group






Western Retail Park
Nangor Road
Dublin 12
Ireland
Issue 1 210514

Tel: +353 1 7099000
Fax: +353 1 7099060
Email: info@led.ie
Website: www.led.ie



Installation:

1. Ensure mains supply is switched off before commencing work
2. Possible to change trims to a different colour (white or satin silver)
3. Before cutting, ensure that the hole does not impinge on joists, pipe work, cables or other building services
4. This luminaire requires a round hole $\text{Ø}72\text{mm}$ to be cut into the ceiling for correct installation.
5. Connect AC power supply cable to the terminal of luminaire. (Brown to L and Blue to N)
6. Hold retention spring vertically against heat sink, push fitting through the cut-out until the springs come down on the upper side of the plasterboard. Ensure that the fitting is secure and the bezel is tight against the ceiling
7. Adjust orientation of luminaire to illuminate desired area

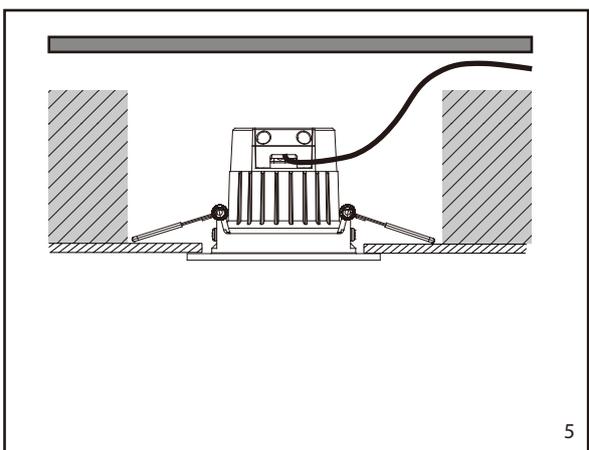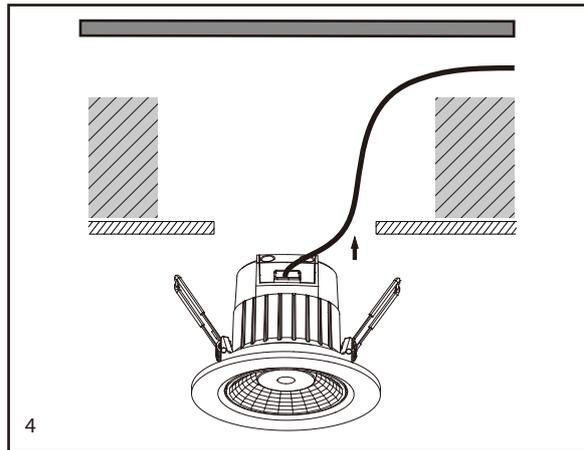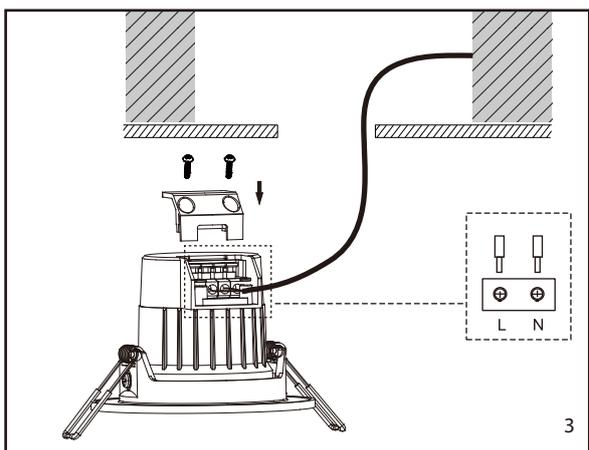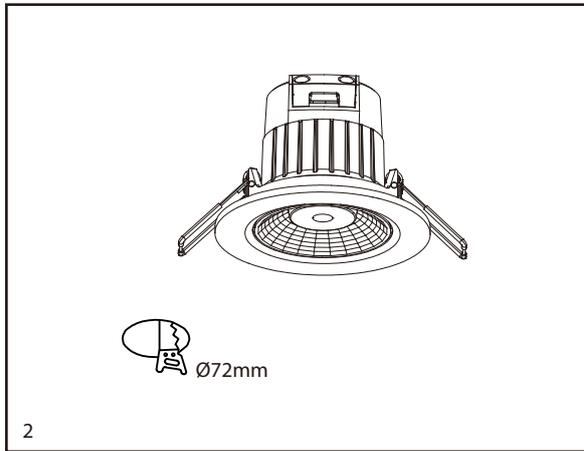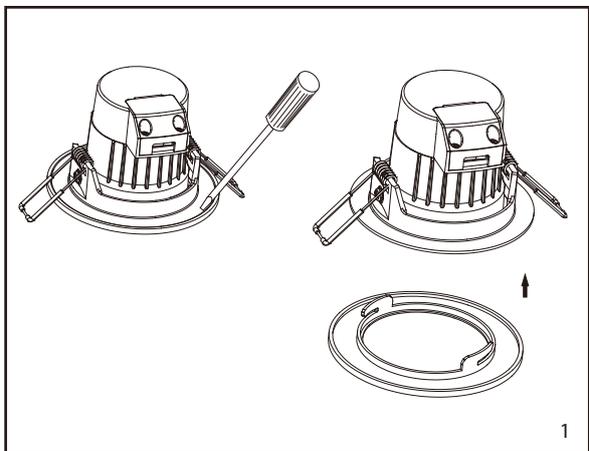

The Installation must be carried out by an electrician

LED Group

Western Retail Park
Nangor Road
Dublin 12
Ireland

Tel: +353 1 7099000
Fax: +353 1 7099060
Email: info@led.ie
Website: www.led.ie

